SS-E44

AEP Model
UK Model

SPEAKER SYSTEM

SPECIFICATIONS

Speaker System:	2-way speaker system
Speaker Units:	Woofer: 20 cm (7-7/8''), cone type Tweeter: 3 cm (1-3/16''), balanced-drive type
Enclosure Type:	Bass reflex Removable front grille
Finish:	Black vinyl, or grained vinyl finish on teak or walnut
Volume:	26 liters
Nominal Impedance:	8Ω
Power Handling Capacity:	Nominal 40W DIN 45500 Music 65W DIN 45500
Sensitivity:	91 dB (1W, 1m) 3.2W (96 dB, 1m) DIN 45500
Frequency Range:	50 Hz – 20 kHz $^{+4}_{-8}$ dB DIN
Crossover Frequency:	6 kHz
Dimensions:	Approx. 270 (w) x 570 (h) x 250 (d) mm 10-3/4 (w) x 22-1/2 (h) x 9-7/8 (d) inches
Weight:	Approx. 7 kg (15 lb 6 oz) per speaker, net, including front grille Approx. 16 kg (35 lb 4 oz) pair, in shipping carton

SCHEMATIC DIAGRAM

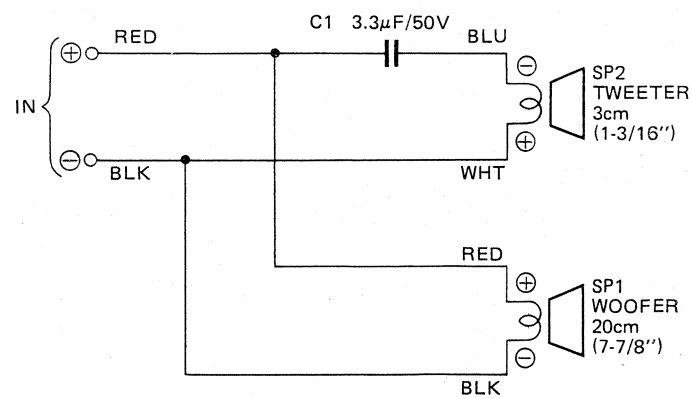

MICROFILM

SONY®
SERVICE MANUAL

SS-E44

EXPLODED VIEW

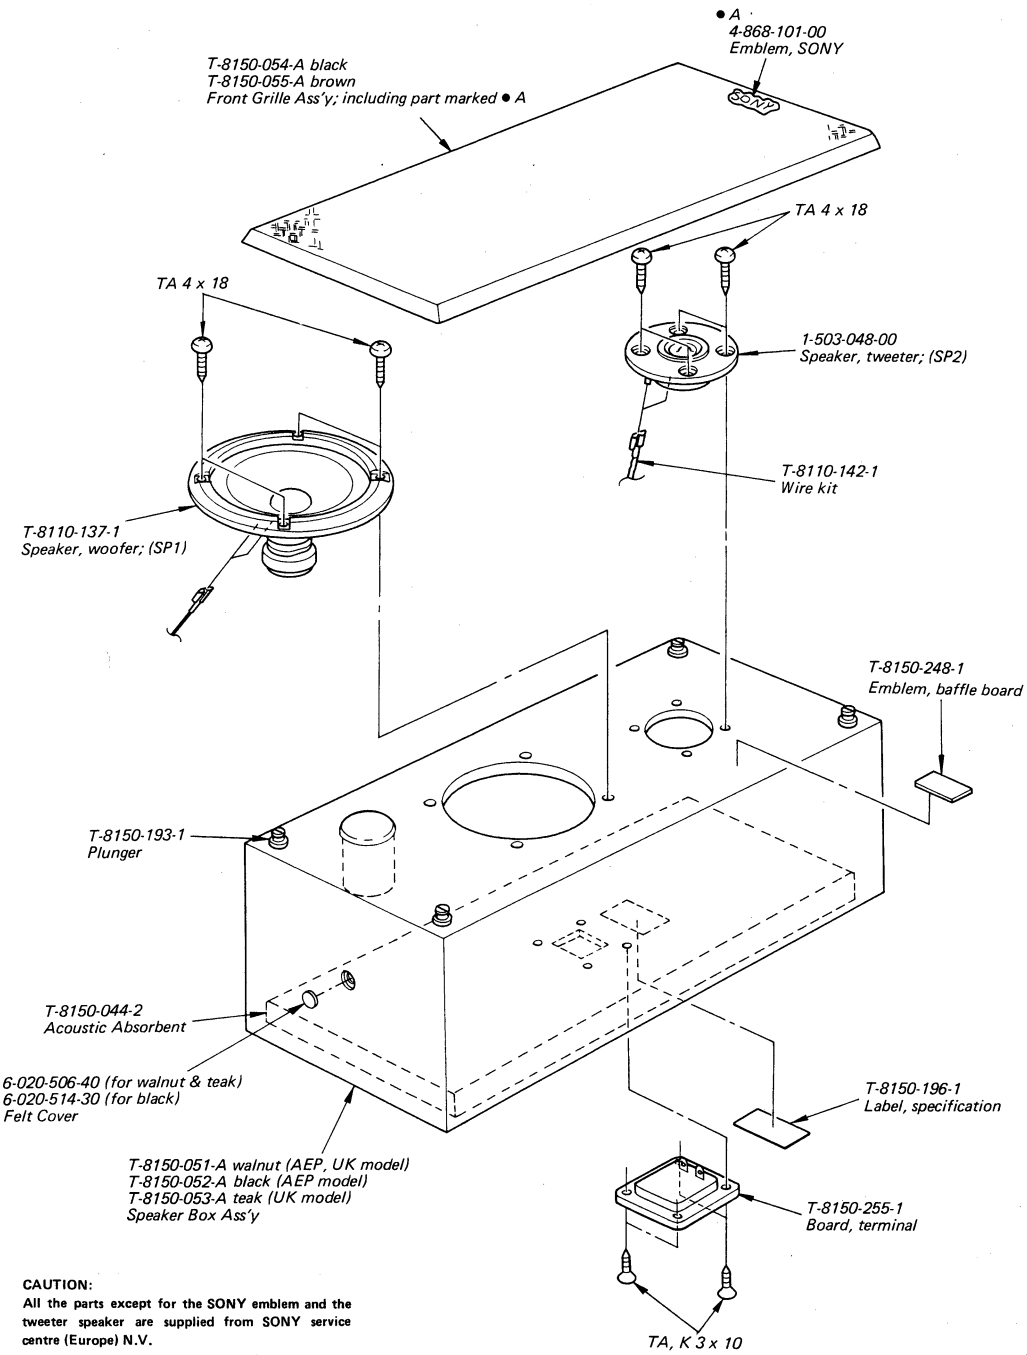

CAUTION:
All the parts except for the SONY emblem and the tweeter speaker are supplied from SONY service centre (Europe) N.V.

- All screws are Phillips (cross recess) type unless otherwise noted.

ACCESSORIES AND PACKING MATERIALS

Part No.	*Description*
T-8110-141-1	Cord, speaker
T-8150-040-1	Cushion
T-8150-218-1	Manual, instruction
T-8150-249-1	Bag, plastic
T-8150-250-1	Carton
T-8150-251-1	Divider

Sony Corporation
© 1981